
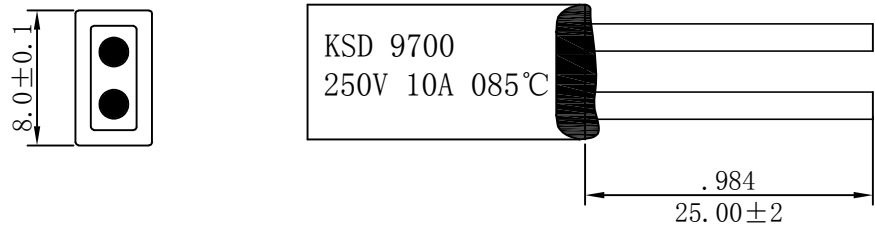


SPECIFICATIONS

- * CONTACT TYPE : Normally Closed
- * ACTION TEMP : 085° C ± 5 °C
- * RESET TEMP : 040° C ± 15 °C
- * TERMINAL SIZE : Amp #DIY TAB
- * CIRCUIT RESISTANCE : 50mΩ MAX.
- * INSULATION RESISTANCE : 100MΩ min. at DC 500V
- * DIELECTRIC STRENGTH : AC 1450V For One Minute
Or AC 1800V For One Sec
- * ELECTRICAL RATING : 5A 250VAC (Resistive Load)
- * APPROVALS: CQC
- * OPERATING LIFE AND APPROVALS : 10,000 Cycles :10A 250VAC
- * Wireway:UL1332 22AWG 300V 200°C Black

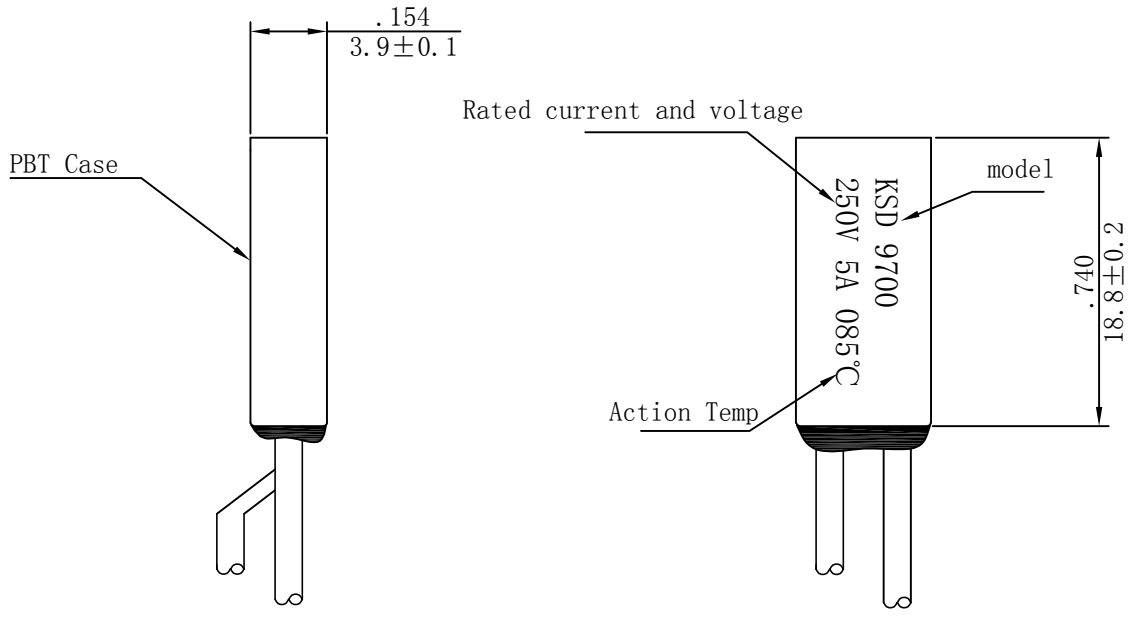

INCH
MM

| | | | | | |
|-------------|----------|--------|-------|----------|--------------------|
| SCALE | 2:1 (mm) | | | | |
| | | Series | 9700 | Code | KSD9700A085B-45-PW |
| | | Unit | mm | Customer | |
| | | draft | check | sale | approve |
| Description | Draft | XIR | | | |

Light Country (CHANGSHU) CO.,Ltd.

Http://www.ksdswitch.com